



Economical Protection

Hydroséal Canada's **KIYO** Y strainers protect tubing system components from damage caused by dirt or debris in the process media. They cost less than other types of strainers and are lightweight and compact. Because they can often be supported by the pipeline alone, they work in applications where other types of strainers cannot.

Rugged Plastic Screens

Hydroséal Canada's **KIYO** Y strainers are supplied with a perforated plastic screen. This screen is ultrasonically welded, not glued, for superior performance and strength. Screens fabricated from type 316 stainless steel are also available in openings from 1/2" down to super-fine 325 mesh. All screens have an open area at least twice that of the equivalent tube-size cross sectional area to minimize pressure drop.

Features

- Rated at 150 PSI
- Full Port Design
- True Union Functionality
- Easy Screen Access
- Mesh 20 Default Screens
- Wrench Tool for Easy Opening
- Suitable for Vertical and Horizontal Installations
- Suitable for ASTM, DIN, JIS and CNS systems
- NSF Compliant

Easy Clean Out

All sizes of Hydroséal Canada's **KIYO** Y strainers feature heavy duty caps that permit quick and easy removal of the strainer screen when cleaning is necessary.

Adaptable Design

Hydroséal Canada's **KIYO** Y strainers will work equally well in horizontal and vertical installations, simplifying tubing installations.

All Plastic Construction

Hydroséal Canada's **KIYO** Y strainers are all-plastic. They will never rust or corrode - and do not require painting or coating to operate in corrosive environments.


Options

- Mesh 8, 12, 30 Screens
- Stainless Steel Screens
- PVC, CPVC, PP and PVDF
- EPDM, Viton or Nitrile O-Rings


SIZE: 1/2" ~ 4"

JOINT END:
SOCKET - ASTM, DIN, JIS
THREAD - NPT, BSPT

WORKING PRESSURE:
150 PSI

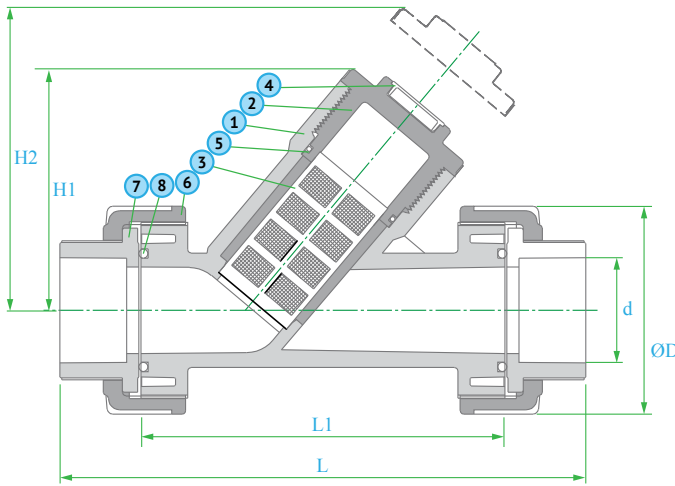

CONSTRUCTION			
NO	PARTS	PCS	MATERIALS
1	BODY	1	PVC, CPVC, PP, PVDF
2	CAP	1	PVC, CPVC, PP, PVDF
3	SCREEN	1	PP, SUS316
4	IDENTIFIER	1	ABS
5	O-RING	1	EPDM, VITON
6	UNION NUT	2	PVC, CPVC, PP, PVDF
7	CONNECTOR	2	PVC, CPVC, PP, PVDF
8	O-RING	2	EPDM, VITON
9	WRENCH	1	ABS

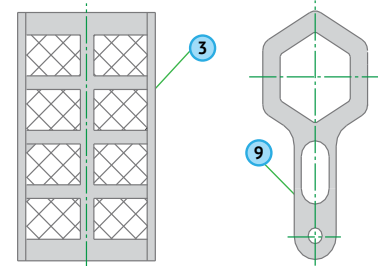

PART	NOMINAL SIZE	SOCKET, THREAD TYPE			ASTM	DIN	JIS	UNIT OF MEASURE: MM		
		DN	D	L1				L	d	d
KYES.0050	1/2"	DN 15	56.0	110.0	172.0	21.5	20.3	22.3	85.0	130.0
KYES.0075	3/4"	DN 20	56.0	110.0	172.0	26.9	25.3	26.3	85.0	130.0
KYES.0100	1"	DN 25	66.0	126.0	197.0	33.7	32.3	32.3	92.0	150.0
KYES.0125	1 1/4"	DN 32	98.0	173.0	254.0	42.4	40.3	38.4	122.0	205.0
KYES.0150	1 1/2"	DN 40	98.0	173.0	254.0	48.6	50.3	48.5	122.0	205.0
KYES.0200	2"	DN 50	120.0	204.0	297.0	60.6	63.3	60.6	141.0	230.0
KYES.0250	2 1/2"	DN 65	-	-	-	73.8	75.3	76.6	-	-
KYES.0300	3"	DN 80	-	-	-	89.3	90.3	89.6	-	-
KYES.0400	4"	DN 100	-	-	-	114.8	110.3	114.7	-	-

SELECTION CHART				
SIZE	MATERIAL	CONNECTION	SEALS	PRESSURE RATING
1/2" ~ 4"	PVC CPVC PP, PVDF	SOCKET or THREAD	EPDM or VITON	150 PSI @ 73F Non-Shock

CV FACTORS			
SIZE	FACTOR	SIZE	FACTOR
1/2"	3	2"	30
3/4"	5	2 1/2"	-
1"	7	3"	-
1 1/4"	15	4"	-
1 1/2"	20	6"	-

* With 1/32" plastic screen

Pressure Loss Calculation Formula


$$\Delta P = \left[\frac{Q}{C_v} \right]^2$$

ΔP = Pressure Drop
 Q = Flow in GPM
 C_v = Flow Coefficient

The pressure drop across the strainer, for water or fluids with a similar viscosity, can be calculated using this formula:

the pressure loss across a valve or filter can be calculated using the system's flow rate and the Cv factor for that valve or filter.

For example, a 1" strainer with a Cv factor of 8 will have a 4 PSI pressure loss in a system with a 16 gpm flow rate $(16 / 8)^2 = 4$

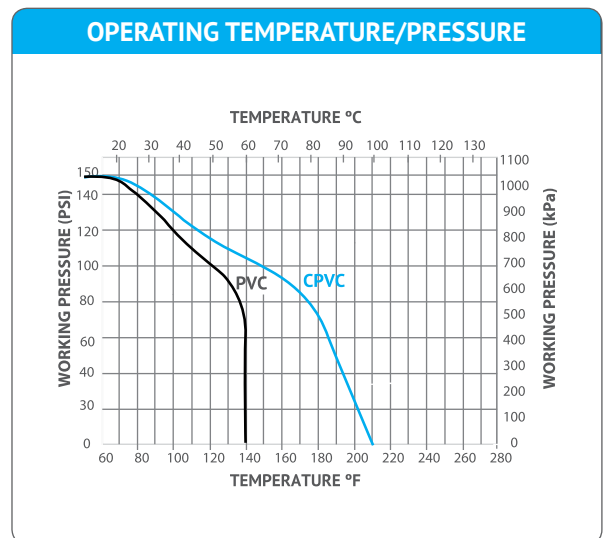

Strainer Screen Selection

- Y Strainers are furnished with a 1/32" perf plastic screen.
- Stainless steel strainer screen are available in these perfs: 1/32", 3/64", 1/16", 5/64", 7/64", 1/8", 5/32", 3/16", 1/4", 1/2"; and in mesh sizes: 20, 40, 60, 80, 100, 200, 325